



siniat paper **tape**

Siniat **paper tape** is a spark perforated paper tape designed to reinforce recessed edges and butt joints for plasterboard systems. Siniat **paper tape** can be used for hand or mechanical tool application.

Siniat **paper tape** is tested and approved for Siniat systems. For the strongest joint Siniat recommends using our **paper tape** with either **mastabase**, **mastalongset** or **mastatape-in** for first and second coats, with a final coat of any Siniat finishing or all purpose compound.

key benefits

- machine roughened for superior bonding
- centre creased for easy application
- spark perforated to prevent blistering

product information

size	76 m roll, 153 m roll
perforation type	spark perforated
material	machine roughened paper
system usage	joints and internal corners of all systems including fire rated, wet area and standard
colour	white

performance

Strength

Made from special paper providing greater tensile strength to prevent tearing, wrinkling or stretching. Provides a strong joint.

Bonding

Machine roughened paper for superior bond generation.

Ease of use

Precision made centre crease for easy application.

Efficient

Can be used with mechanical tools for fast and efficient tape application.

Compatible

Compatible with all Siniat jointing compounds.

application

Paper tape must be used in fire rated and wet area systems. Siniat recommends the use of **paper tape** for all applications to create the strongest joint.

Siniat **paper tape** is designed to be used by both hand and automatic tool application. Siniat **paper tape** is used in combination with compound to joint plasterboard walls and ceilings. All joints must be evenly finished with compounds and lightly sanded to remove tool marks and ridges prior to decoration.

Level 4 Finish and Level 5 Finish must use the 'Three Coat Jointing System' for all joints. Internal corners only require a Bedding Coat and a Finish Coat.


A 'Three Coat Jointing System' consists of a Bedding Coat, a Second Coat and a Finish Coat of compound.

mastalite or **mastaline** may be used as an alternative to **mastatape-in** for the second coat. Setting cements like **mastabase** and **mastalongset** must not be applied over air drying compounds.

Optimise product performance by:

Storing in closed cartons at normal room temperature in an enclosed dry area. Maintaining a minimum 10°C working temperature during application and drying. Maintain appropriate ventilation to avoid excess moisture.

FIGURE 10 Minimum Coat Widths

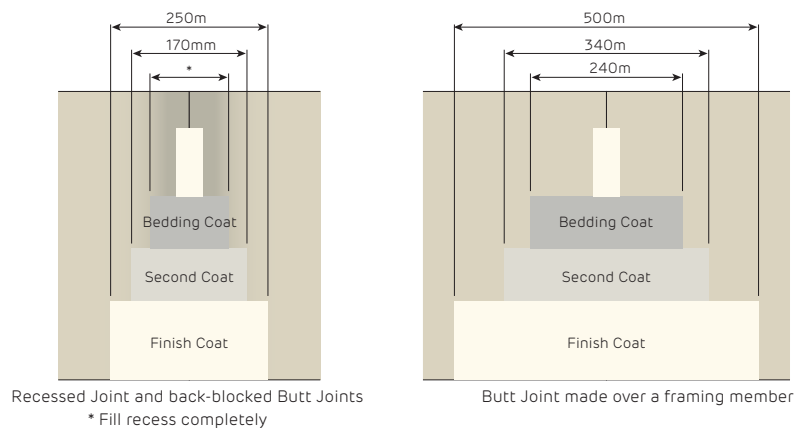



Quality
ISO 9001



All Siniat products have been developed to meet the specific needs of the Australian market. Products manufactured in Australia comply with quality systems certified as complying with AS/NZS ISO 9001:2015 and meet the requirements of AS/NZS 2588, Gypsum Plasterboard.



The following Siniat products have been independently certified by Global GreenTag to GreenRate Level A: **mastashield**, **fireshield**, **fireshield h**, **soundshield**, **watershield**, **spanshield**, **multishield**, **curveshield**, **opal**, **trurock** and **trurock hd**. Compliance certificates are available on siniat.com.au.



All Siniat plasterboard and metal products are available on the Siniat Carbon Neutral Opt-In program to help you meet your sustainability goals. Visit siniat.com.au to find out more.

Disclaimer

Products manufactured and systems designed by Etex Australia Pty Ltd and branded Siniat, are produced in accordance with the Building Code of Australia and relevant Australian Standards. Information in this document is to be used as a guide only and is subject to project approval as many aspects of construction are not comprehensively covered. It is also the responsibility of the project to determine if Siniat's products and systems are suitable for the intended application. Etex Australia Pty Ltd will not be held responsible for any claims resulting from the installation of its products or other associated products not in accordance with the recommendations of the manufacturer's technical literature or relevant Australian Standards. Siniat technical information is regularly updated. To ensure this document is current with the latest information, visit siniat.solutions

Siniat.solutions provides a host of online solutions for your product

siniat SELECT[®]

offers an online system selector and custom design specification proposal, developed by us and catered to your project's requirements.

siniat CALCULATE[®]

is a range of online calculation tools for the professional. Explore siniat.solutions on siniat.com.au.



Etex Australia Pty Ltd

ABN 61 003 621 010
31 Military Road, Matraville
NSW 2036

siniat.com.au



warranty

Siniat's products are guaranteed by a 10 Year Warranty. For details visit siniat.com.au

technical advice
AU 1300 724 505