

Bradys... Providing perfect cover - everytime.

International Hardwall



- IMPROVED formula
- EASIER to apply
- CONSISTENT setting time

Cover it with Bradys!

bradys.com.au

BRADYS
PLASTER PRODUCTS

Bradys... Building on over 70 years experience!

With a reputation as Western Australia's leading supplier of quality plaster compounds for over 70 years, it comes as no surprise that Bradys plaster products and compounds have been specially formulated for the professional plasterer who is looking for a lightweight and superior product.

Extremely easy to mix, work and apply, Bradys plaster products and compounds provide an excellent bond with either traditional clay bricks or aerated concrete blocks.

We have reduced the risk of product tampering and wastage which means that Bradys plaster products and compounds will also significantly improve on site cleanliness, reduce time delays and lessen demanding labour requirements.

Bradys Plaster Products and Compounds

Bradys plaster products and compounds are suitable for all residential and commercial requirements.

Bradys proven manufacturing techniques along with world class plant, equipment and facilities ensures that all plasters and compounds meet the stringent demands of regulatory bodies throughout Australia.

The company's pursuance of excellence also ensures Bradys plaster products and compounds are of a premium quality.

INTERNATIONAL HARDWALL

Specifications

APPLICATION:


1. This plaster has been formulated for use by plasterers in conjunction with lime putty to achieve a flat, hard finished surface on walls and under slab soffit ceilings.
2. The combined products should be applied at a nominal thickness of 2-3mm to surfaces free from dust and residue.
3. The setting time of Bradys International Hardwall Plaster is 60-90 minutes.

NOTE: Application of Bradys International Hardwall over substrates that contain excess levels of fluidising agents will cause variations and inconsistency in setting time.

Made in WA



LOCAL STOCKIST

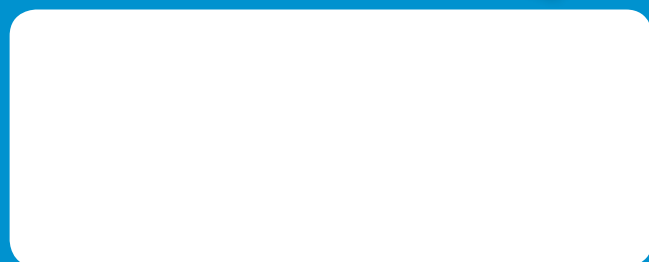

Mixing:

1. Into a clean mixing drum add approximately 1.5 - 2 x 20 kg bags of Bradys International Hardwall and 3 x 25kg bags of lime putty with an average solids content of approximately 40% and sufficient potable water to achieve the required working consistency.
2. Allow to soak for approximately 2 - 3 minutes.
3. Mix using a mechanical mixer until a smooth even gauge is achieved that is free from unmixed plaster.
4. During hot summer months, wet walls thoroughly, as it is imperative that the plaster has time to set before it dries. Should the plaster dry before it sets, apply water to the finished wall to allow the setting action of the plaster to be completed.

NOTE: The addition of too much lime will not only decrease the setting time of the mix, but will result in a weak and soft finishing coat to the walls.

NOTE: Do not over mix as this may reduce the setting time of the plaster.

NOTE: Do not mix with other products as this will affect product performance and/or setting time.

Suitability:

Standard sand/lime/cement float coats.

REMEMBER

STORE IN A COOL DRY PLACE AND NEVER PLACE DIRECTLY ON A CONCRETE FLOOR OR WET SAND.

ETEX: HELPLINE - (08) 9374 2900

PRECAUTIONS

- RISK:** The dust and paste may be irritating to the skin, eyes and respiratory system.
- SAFETY:** Avoid contact with eyes and skin. Avoid breathing dust. Wear suitable protective clothing. Wash thoroughly after handling. Wash work clothes regularly. Work in a well ventilated area.
- FIRST AID:** If affected by dust, remove to fresh air. Irrigate eyes with plenty of water for 10 minutes. Wash skin thoroughly with mild soap and water.
- DISPOSAL/SPILLS:** Clean up by wet sweeping or vacuuming and follow above safety precautions. Collect in covered containers for disposal in accordance with local authority guidelines.
- FIRE:** Bradys International Hardwall is a non-flammable product. However, can emit oxides of sulphur and carbon dioxide if heated to decomposition.

Etex Australia Pty Ltd

290 Bushmead Road, Hazelmere, Western Australia 6055

Telephone: (08) 9374 2900 Facsimile: (08) 9374 2901

Postal Address: PO Box 1994, Midland DC, Western Australia 6936

Warranty:

Bradys warrants its products to be free from defects caused by faulty manufacture or materials. If any of its products are so defective the Company will at its option, repair or replace them, supply equivalent replacement or reimburse price. This warranty shall not apply to any loss or consequential loss suffered through or resulting from defects caused by faulty manufacture or materials.

Cover it with Bradys!

bradys.com.au

BRADYS
PLASTER PRODUCTS